

Prisoner's dilemma on co-evolving networks under perfect rationality

Christoly Biely^{a,b}, Klaus Dragosits^a, Stefan Thurner^{a,b,*}

^a *Complex Systems Research Group
HNO, Medical University of Vienna
Währinger Gürtel 18-20, A-1090 Vienna, Austria*

^b *Atominstitut der Österreichischen Universitäten
Stadionallee 2, A-1020 Vienna, Austria*

Abstract

We consider the prisoner's dilemma being played repeatedly on a dynamic network, where agents may choose their actions as well as their co-players. This leads to co-evolution of network structure and strategy patterns of the players. Individual decisions are made *fully rationally* and are based on *local information* only. They are made such that links to defecting agents are resolved and that cooperating agents build up new links. The exact form of the updating scheme is motivated by profit maximization and not by imitation. If players update their decisions in a synchronized way the system exhibits oscillatory dynamics: Periods of growing cooperation (and total linkage) alternate with periods of increasing defection. The cyclical behavior is reduced and the system stabilizes at significant total cooperation levels when players are less synchronized. In this regime we find emergent network structures resembling 'complex' and hierarchical topology. The exponent of the power-law degree distribution ($\gamma \sim 8.6$) perfectly matches empirical results of human communication networks.

Key words: Cooperation, Evolutionary Games, Networks

* Corresponding author, present address: Complex Systems Research Group, HNO, Medical University of Vienna, Währinger Gürtel 18-20, A-1090 Vienna, Austria; email: thurner@univie.ac.at

1 Introduction

The recent years have seen a drastic increase of interest in understanding the emergence of complex structures in nature and society. In this context, network theory has played an important role because it provides a topological substrate of discrete real-world interactions [1,2]. The science of networks basically follows two main lines of research: On the one hand the formation of network structures is studied involving predominately *topological* parameters (e.g. preferential attachment [1]). On the other hand, dynamical processes *on* networks with fixed topology have been studied, see e.g. [3]. In this context, also game theoretic models – in particular the prisoners’ dilemma – have been analyzed on distinct network topologies. So far not much work has focused on the co-evolution of topological *and* internal degrees of freedom, see however [4] for a quite general starting point. In the article we want to specifically address this matter by discussing a model where internal and topological degrees of freedom mutually influence each other. The model is based on the prisoner’s dilemma (PD) [5] – one of the most impressive ways of illustrating situations of human interactions where mutual trust is beneficial, but egotism leads to a breach of promise. The fundamental interest in the PD arises from its applicability in a variety of fields, ranging from physics and biology to economics and finance [6,7,8]. It is of particular interest in constitutional economics [9,10,11].

The central point in the PD dilemma is the payoff matrix, whose specific form reads for the payoff of one of two players, say player i ,

$$P_{ij} = \begin{pmatrix} R & S \\ T & P \end{pmatrix} \quad P_{ij} = \begin{pmatrix} 3 & -1 \\ 4 & 0 \end{pmatrix} \quad . \quad (1)$$

Each player has two options: she can defect (D) or cooperate (C). Mutual cooperation yields the highest total payoff – giving each of the players an equal payoff of R (reward); this is the optimal strategy when seen from a ‘global’ point of view. If one of the players defects while the other cooperates, the highest attainable individual payoff – i.e. the temptation, T – goes to the defector and the cooperator receives the lowest possible payoff, the sucker’s payoff, S . The cooperator would have been better off if he would have defected, thus receiving the payoff I . In a one-shot game, the dilemma holds as long as the entries of the payoff matrix, Eq. (1), satisfy $S < I < R < T$ and $2R > T + S$.

Much research has concentrated on spatial aspects of this game, initially introduced in the pioneering work of Nowak & May [12]. In their work, players are located on a square lattice and play repeatedly (!) with their neighbours. Cooperation is made possible by the assumption, that every agent imitates his

neighbours in such a way, that they *synchronously* choose the actions of the neighbours who got the highest payoff in the last turn. This specific rule of evolution leads to non-trivial complex spatio-temporal dynamics. It has been noted that the model is seriously troubled by the fact that an asynchronous update of strategies leads to the break-down of cooperation [13].

Carrying the discussion to more complex structures, the initial model of Nowak & May and slight adaptations thereof have been extensively studied under the aspect of different interaction topologies, see [14] for a review of recent developments. In [15] it was shown, that for a variety of dilemmas (including the PD), heterogeneous networks (e.g. scale-free networks) favor the emergence of cooperation. The role of hierarchical lattices was elaborately discussed in [16]. Interesting aspects of the PD on random graphs have been analyzed in [17]; the role of small world networks was tackled in [18]. Effects of entries in the payoff matrix and addition of noise have been examined on different types of two-dimensional lattices [19]. Other topology related topics, such as the role of an 'influential node' [20] and optional participation [21] have been examined as well. In essence, a vast number of possible topologies and formulations has been studied. However the networks are static and do not dynamically evolve.

It is important to note that internal sanctions (refusal/termination of links) and positive feedback mechanisms ('preferential' choice of cooperating agents) are both directly related to variability of the underlying network and may play an important role in real-life situations. Few, but promising works have brought forward research towards this end in the recent years: In [22], players keep a running average of payoffs obtained from each other player in a simulated tournament. These averages effectively determine whom to approach and whom to accept as co-player in the future. The strategies are basically determined by the 'genetic code' of the players and altered by crossover and mutation during the tournament. In [23] it was examined how preferential partner selection influences the performance of fixed strategies, thus serving as a starting-point for models in which players can also choose their strategy. Recently, results where the evolution of strategies is driven by imitation and coupled with evolution of the interaction network have been presented [24] (see [25] for a discussion of sociological aspects). Keeping the total number of links fixed, the authors found that the system may reach a steady state where agents predominantly cooperate.

In the present paper, we want to study the formulation of the prisoner's dilemma including both: network dynamics and choice of actions. Close to the 'original formulation' of the PD rationality (not imitation) will be the basis of individual decisions. We also keep information-horizons local, thus basing our model-dynamics on a quite strict interpretation of the *homo oeconomicus*. We show that the dilemma of overall defection can be overcome despite rationality, thus resolving the prisoner's dilemma: Even within a population of selfish

agents (who maximize their expected payoffs for the next turn) cooperation emerges without the necessity of external rules, imitative behaviour or the introduction of strategies. As no memory of the agents is involved, our model also remains also temporarily local and incorporates co-evolutionary dynamics which display interesting collective phenomena and nonlinear dynamics. It is especially intriguing that the resulting cooperation networks show the same power-law exponents as those found in real communication networks, in particular in mobilephone-call networks [26].

The paper is structured as follows: The model is presented in Section 2. In Section 3 results based on a numerical implementation of the model are presented. The influence of model parameters are discussed as is the structure of the networks obtained. Finally, a discussion of the main results is provided in Section 4.

2 The model

We consider a network with a fixed number of N agents/players with a variable number L of links between them, where linked agents play the PD-game. By $\tilde{N}_i(t)$ we denote the set of $l_i(t)$ neighbours of agent i on the network at timestep t . The actions of the agents are encoded in two-dimensional unit-vectors, i.e. $a_i(t) = a^c = (1, 0)$, if agent i cooperates and $a_i(t) = a^d = (0, 1)$, if agent i defects. We assume that agent i has full knowledge about the chosen strategy $a_j(t)$ and the payoff $P_j(t)$ of each of her neighbours j , but no knowledge about these quantities for all the other players (local information). At each timestep, agent i performs an update of his action and local neighbourhood with probability p_u . Thus, decisions for choosing neighbours and the actions are made simultaneously by an average number of $N^{update} \approx p_u N_{tot}$ agents. For $p_u = 1$, the decisions of the agents are fully synchronized, whereas $p_u < 1$ automatically includes the important case of asynchronous updates [13]. Once chosen for update, agent i performs maximization of her expected payoff in the next round, i.e. she maximizes

$$\bar{P}_i(t+1) = \sum_{j \in \tilde{N}_i(t+1)} a_i(t+1) P_{ij} \bar{a}_j(t+1) \quad . \quad (2)$$

Here, P_{ij} denotes the payoff matrix, Eq. (1), and $\bar{a}_j(t+1)$ the expected action of neighbour j . The preceding action is taken as reasonable expectation value¹, $\bar{a}_j(t+1) = a_j(t)$. In Eq. (2), profit-maximization of agent i is performed by

¹ This step may be criticized as being inductive. However, for $p_u < 1$ player i will know that his neighbours will keep their strategy on average. Thus our argument is inductive only for $p_u = 1$.

adjusting the future action $a_i(t+1)$ as well as the future (expected) neighbourhood $\tilde{N}_i(t+1)$. At this point, further substantiation of the network-dynamics is inevitable. In the following we will specify detailed rules concerning the individual updates $\tilde{N}(t) \rightarrow \tilde{N}(t+1)$.

First, we assume that agents cancel a link if the payoff with the respective co-player is smaller than, or equal to zero, i.e. if the link does not pay off. A unilateral decision for link-cancellation will suffice to break off of a relationship. The maximum number of links agents may cancel in one period is limited by a model-parameter α ; the neighbourhood after cancellation of α links is depicted by $\tilde{N}_i(t+1; \alpha)$. The parameter α models the maximum number of relations (to defectors) one is willing to quit per timestep, thus describing the 'sanction-potential' in the system.

As far as the creation of new links is concerned, we conceive that only agents who have chosen to cooperate have the possibility to establish new links. We make this assumption for 2 realistic reasons: On the one hand, one could assume that the players enter commitments about their future strategies (a typical element of cooperative game theory). Then, their strategies will practically be known in advance by potential co-players and it is reasonable that links offered by agents who announce to defect will not be accepted. On the other hand, it is tempting to conjecture that a mechanism of 'recommendation' governs decisions of acceptance or refusal of new link-proposals: It is only rational (and we have assumed rationality of the players) that next-to-nearest neighbours of i will 'poll' neighbours in common with i to get an idea about i 's strategy and that they would only accept a link offered by i in case i is 'known' to cooperate. In this framework it is natural that unilateral decision to establish a new connection will suffice, i.e. if player i cooperates and decides to link with player j , the link will be accepted with certainty as j has no reason to refuse (the new link will allow him to pocket in a riskless profit). Together with the unilateralism in cancellation of links this makes complicated 'matching' of the agents' decisions unnecessary. We limit the maximum number of links which may be established per timestep by the parameter β ; thus we incorporate some constraint on resources which can be spent to establish new links². The new neighborhood associated to establishment of β links is depicted by $\tilde{N}_i(t+1; \beta)$. In summary, the parameters α and β can also be seen as 'agility' or willingness to change partners upon new information.

With the given specification of network-dynamics, we can formulate the maximization of the payoff, Eq. (2), in the following way: Each of the N^{update} agents

² In future work, it could be interesting to study the effect of costs by making β proportional to some measure of payoff.

calculates the expected payoff in case of cooperation,

$$\bar{P}_i^c(t+1) = \sum_{j \in \tilde{N}_i^c(t+1)} a_i^c P_{ij} a_j(t) = \sum_{j \in \tilde{N}_i(t+1; \alpha)} a_i^c P_{ij} a_j(t) + \bar{P}_i^{add}(t+1; \beta) \quad (3)$$

and the expected payoff in case of defection,

$$\bar{P}_i^d(t+1) = \sum_{j \in \tilde{N}_i^d(t+1)} a_i^d P_{ij} a_j(t) = \sum_{j \in \tilde{N}_i(t+1; \alpha)} a_i^d P_{ij} a_j(t) \quad (4)$$

and will choose the strategy with the higher payoff (if payoffs are equal the strategy is chosen at random). $\tilde{N}_i^c(t+1)$ and $\tilde{N}_i^d(t+1)$ denote the 'expected' neighbourhoods for the two cases. For cooperation they can be written as $\tilde{N}_i^c(t+1) = \tilde{N}_i(t+1; \alpha) \cup \tilde{N}_i(t+1; \beta)$ and for defection as $\tilde{N}_i^d(t) = \tilde{N}_i(t+1; \alpha)$ ($A \cup B$ denotes the union of sets A and B).

Now, the missing piece for determining the action in the next timestep is the estimation of the additional expected payoff $\bar{P}_i^{add}(t+1; \beta)$, which can be acquired due to new links. To do so, each agent performs an evaluation of the neighborhood only using information about nearest neighbors, as illustrated in Figure 1: Agent i first evaluates her payoff obtained from the set of neighbours he and j have in common, denoted by $P_{\tilde{N}_{(i,j)}}$. He can then subtract this payoff from j 's total payoff, $P_j(t)$, to obtain an approximation of the profit j gains from the neighbours they do *not* have in common, denoted by $N_{(i,j)}^{non}$. Weighting this estimate with the fraction $\beta/N_{(i,j)}^{non}$ and averaging over all neighbours $\tilde{N}_i(t)$, agent i obtains the expected additional payoff he receives when establishing β random links to next-to-nearest neighbours

$$\bar{P}_i^{add}(t+1; \beta) = \frac{1}{\tilde{l}_i(t)} \sum_{j \in \tilde{N}_i(t)} \Theta(P_j(t)) \left(P_j(t) - P_{\tilde{N}_{(i,j)}}(t) \right) \frac{\beta}{N_{(i,j)}^{non}} \quad , \quad (5)$$

which completes the model. Regarding the sum in Eq. (5), we found it realistic to confine the summation over $\tilde{N}_i(t)$ to a summation over a subset of $\tilde{N}_i(t)$, namely to the first-nearest neighbours of i who have a payoff $P_j(t) > 0$: It would be barely rational for an agent to build up links for which he knows that the expected payoff is negative on average. This is also why $\tilde{l}_i(t)$ denotes the effective number of neighbours contributing in the sum. Although the numerical results given in the next section refer to this specific formulation of the model, dropping the $\Theta(P_j(t))$ -term practically gives the same results (we will discuss the miniscule effect of this term below). We also note, that Eq. (5) gives the highest possible value only if all next-to-nearest neighbours

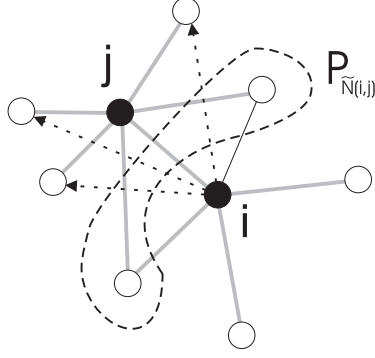


Fig. 1. Illustration for the notation of variables characterizing the neighborhood of players i and j . The players have two neighbors in common; the corresponding set is denoted by $\tilde{N}_{(i,j)}$. Agent j has $N_{(i,j)}^{non}$ neighbors not in common with i which are potential new coplayers for i . The payoff player i obtains from the set of neighbours $\tilde{N}_{(i,j)}$ is denoted $P_{\tilde{N}_{(i,j)}}$.

cooperate³.

After the evaluation of Eqs. (3) and (4) has taken place, the strategies of the N^{update} agents are updated at the end of each timestep and links are removed and built up. We have already discussed that there is no need for a complicated 'matching'-procedure, as dynamics are governed by unilateral decisions (of course, it will also happen that two players both decide to play with each other in the next turn). Finally we note, that an agent is randomly wired with one link into the network if he happens to loose all his links during time evolution of the system.

3 Results and Discussion

In the following we discuss the model in dependence of the three main parameters - p_u , α and β . As a starting point for our simulations, we generated random networks [27] of size of $N = 10^3$. Our simulations have clearly shown that the dynamics and the emerging interaction networks do not depend on the initial configurations: The system converges relatively fast towards its attractors (repulsors). Simulations have been typically performed for 10^5 timesteps, providing accurate statistics. If not stated otherwise, the payoff matrix was chosen in the specific form given in Eq. (1). We also studied the effect of changing the entries in P_{ij} which will be discussed below.

³ It is easy to see that, if j does not cooperate, i can adjust for this via calculating his payoff on $\tilde{N}_{(i,j)}$ assuming defection and correcting $P_j(t) - P_{\tilde{N}_{(i,j)}}$ for the difference in the payoff matrix between defection and cooperation.

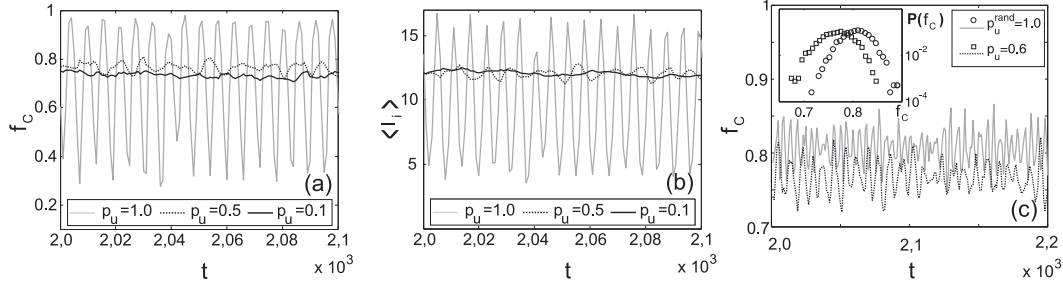


Fig. 2. (a) Time-series of the fraction of cooperating agents f_c for different values of the update-probability p_u ($p_u = 1.0$, $p_u = 0.5$, $p_u = 0.1$), showing decreasing regularity. (b) Time-series of the average number of links $\langle l_i \rangle$ per agent for the same values of the update-probability p_u . Clearly, the time average $\langle l_i \rangle$ for $p_u = 0.1$ and $p_u = 0.5$ is considerably above the case for $p_u = 1$, indicating the stabilisation of the corresponding network. (c) Comparing the time-series pertaining to $p_u = 0.6$ of the model to $p_u^{rand} = 1.0$ of a 'random' formulation of the model described in the text. The inset shows the empirical distribution of both time-series.

3.1 Properties of cooperation time-series

To discuss basic properties of the time-series, Figure 2 depicts the fraction of cooperating agents (denoted by $f_c(t) \equiv N_c(t)/N$) and the average linkage $\langle l_i(t) \rangle = L(t)/N$ of a particular simulation for $\alpha = \beta = 6$ and various values of p_u . For $p_u = 1$, oscillations with a comparably high amplitude are observed. Also the average linkage oscillates strongly between a minimum of about 4 and a maximum of 13 links per agent. The reason for the cyclical behavior of the system can be easily understood: In the states corresponding to low f_c , linkage has been reduced to an extent motivating the agents to build up links again. In configurations with high f_c , the majority of agents has collectively acquired a state of maximum linkage, meaning there is no more motivation to cooperate in our rational setting. This can be easily understood since agent i only cooperates as long as the condition

$$\bar{P}_i^{add}(t+1) + l_i^c(t)R + l_i^d(t)S > l_i^c(t)T + l_i^d(t)I \quad (6)$$

is fulfilled, i.e. as long as the payoff expected from cooperation is larger than the payoff expected for defection. Here, $l_i(t) = l_i^c(t) + l_i^d(t)$, where $l_i^c(t)$ denotes the number of links to cooperating neighbours and $l_i^d(t)$ the number of defecting neighbours. If all neighbours of agent i cooperate ($l_i^d(t) = 0$), he will defect as soon as $l_i(t) > \bar{P}_i^{add}/(T-R)$ where $\bar{P}_i^{add}$ is bound from above by βR . Therefore, for the parameters chosen here agents in a cooperative neighborhood will only cooperate as long as $l_i(t) < 18$. The observed rapidity of the oscillations becomes clear, when one considers that the agents may build up

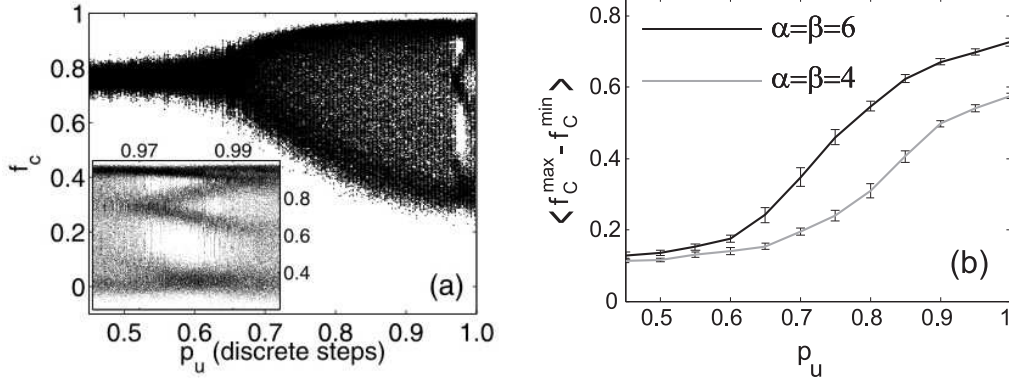


Fig. 3. (a) States f_c visited by the dynamics as a function of the update probability p_u . p_u is changed in discrete steps. For each p_u , 500 consecutive states f_c are plotted. (b) Range $\langle f_c^{\max} - f_c^{\min} \rangle$ of the oscillations as a function of p_u , averaged over 500 independent realizations of time-series.

$\beta = 6$ links per move and therefore reach $l_i^{\max}$ comparatively fast. By lowering α and β the amplitudes reduce, as intuitively expected (not shown).

3.2 Dependence on update-probability p_u

In reality, agents are not infinitely fast in assessing new information in their surrounding, as they need time to adopt and employ decisions. It is known from previous studies [13] that asynchronous update can strongly influence observed dynamics and level of cooperation. Considering this by lowering p_u , the oscillations in the overall population are increasingly damped, indicating that the network is stabilized in comparison to the $p_u = 1$ case (see Figure 2). In contrast to the rapid update mode at $p_u = 1$, the range of f_c exhibits a reduced span (about 12% of the overall population) and the average number of links per agent stabilizes at $\langle l_i \rangle \approx 13$. Only an average of 0.5% of the agents have lost all their links at a given timestep (and are then randomly rewired). Decreasing p_u allows for a mean-field approximation of l_i , denoted $\langle l_i \rangle^{mf}$, based on Eq. (6): If the number of cooperating agents does not oscillate too strongly, the additional payoff averaged over the neighbours can be roughly estimated to be $\langle P_i^{add}(t+1) \rangle \approx \beta R f_c$. Since for the specific form of payoff matrix chosen here $T - R = I - S = 1$ one can simply add $l_i^c(t)$ and $l_i^d(t)$ in Eq. (6) and obtains $\langle l_i \rangle^{mf} \approx 13$ for $p_u = 0.6$ ($f_c \approx 0.75$). The actual observed average of $\langle l_i \rangle \approx 12$ is in agreement with this approximation.

We now investigate the dependence of f_c on the chosen update-probability p_u more closely: In Figure 3a we show the dependence of the f_c states visited in dependence on p_u . The plot shows 500 realizations of f_c (y-axis) for different

values of p_u (taken after discarding the first 10^3 steps for each p_u). In Figure 3a, p_u is thus changed in discrete steps of $\Delta p_u = 0.0025$. One recognizes that the f_c -states are not trivially visited by the system: Although the system is oscillating strongly and periodically at $p_u = 1$ because of deterministic aspects in the evolution, all the points within the amplitude of the oscillations are visited due to the randomness introduced at various points (e.g. randomness in the chosen next-to-nearest neighbours, randomness in the strategy chosen if expected payoffs are equal for cooperation and defection, etc.). Slightly lowering p_u reveals interesting effects on the configuration of the limit cycle (see the inset of Fig. 3a): One recognizes that the limit cycle first comprises 3 main points between which the system 'hops' (i.e. it changes from the state with high f_c to the state with low f_c with one intermediate step and vice versa), then 4 points and then again 3 points. For some values of $p_u \in [0.965, 0.995]$ certain states between f_c^{max} and f_c^{min} are never reached. Between $p_u = 0.7$ and $p_u = 0.6$ the most frequently visited states change from f_c^{max} and f_c^{min} to the average value of f_c (the limit cycle vanishes). This is also evident from plotting $f_c(t+1)$ against $f_c(t)$ in Figure 4. One recognizes that decreasing p_u to 0.7 leads to a smaller gap in the attractor; at $p_u = 0.6$ the gap has vanished (not shown). Further decrease in p_u narrows the space filled by the trajectory of the system (see Figure 4, $p_u = 0.1$). We have also determined the average of the double amplitude $\langle f_c^{max} - f_c^{min} \rangle$ of the oscillations, see Figure 3b. For each value of p_u investigated we simulated various realizations of time-series of length $T = 10^3$ (discarding the first 10^3 steps) and averaged the obtained ranges over these realizations. As Figure 3b shows, the range of oscillations reduces for lower $\alpha = \beta$, as expected. As Figure 3b shows, we did not find that the amplitude follows a simple scaling function along the bifurcation, thus suggesting that the observed change in dynamics is more complicated than a simple Hopf-bifurcation.

As far as the overall dependence of the mean of f_c on p_u is concerned, Figure 5a shows $\langle f_c \rangle$ for different values of p_u . For $\alpha = \beta = 6$, the curve exhibits a maximum at $p_u \approx 0.6$, which can be intuitively understood as a trade-off effect between two aspects: On the one hand decreasing synchronization improves stability and efficiency in the system as the estimates for the future actions of neighbours become better and overreaction (extreme oscillations) is reduced. On the other hand, decreasing p_u reduces efficiency via reducing the reaction of agents to the changes of their neighbours' strategies. Turning towards the aspect of decreasing α and β , the system is stabilized at a higher value of p_u , as the gray line corresponding to $\alpha = \beta = 4$ has its maximum at $p_u \approx 0.7$. This can be intuitively understood: As link-dynamics are slowed down for $\alpha = \beta = 4$ agents have to be able to react slightly faster to employ efficient internal sanctions via cancellation of links. Another intuitive reason lies in the fact that lowering $\alpha = \beta$ effectively reduces the amplitude of oscillations. One would therefore anticipate that the limit cycle vanishes for a higher value of p_u . We also note that these macroscopic dynamics results in a nice aspect:

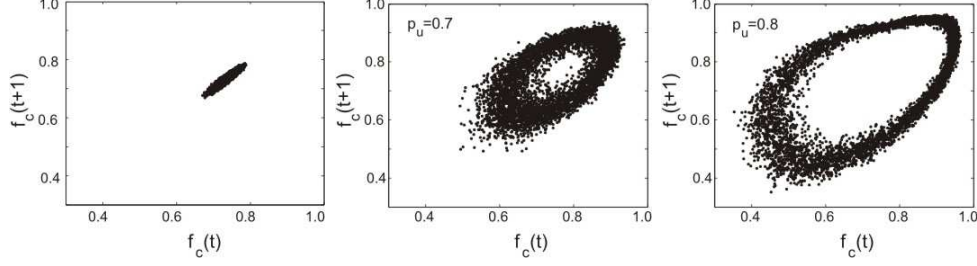


Fig. 4. Visualization of 'attractors' in the space $\{f_c(t), f_c(t+1)\}$ for different values of p_u ($p_u = 0.1$, $p_u = 0.7$, $p_u = 0.8$) and $\alpha = \beta = 6$.

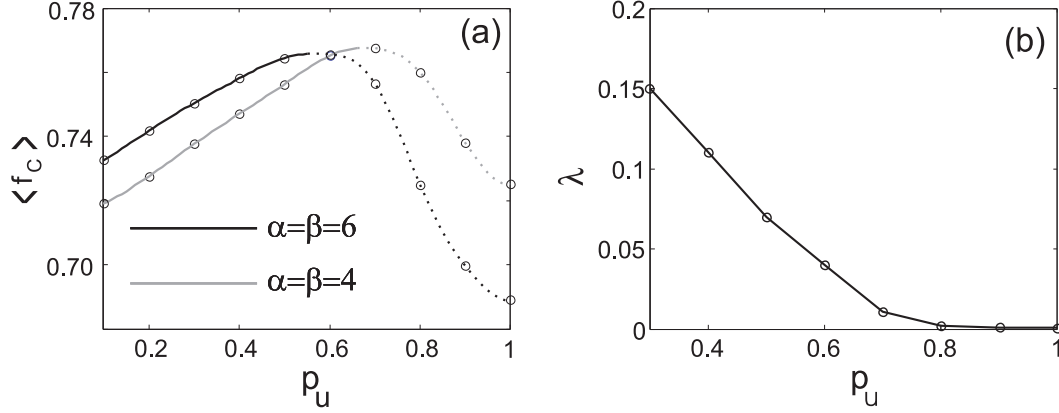


Fig. 5. (a) Average number of cooperating agents $\langle f_c \rangle$ as a function of update-probability p_u for $\alpha = \beta = 6$ and $\alpha = \beta = 4$. (Taking averages of highly correlated time-series is to a certain extent problematic, which is why the line is drawn broken in the corresponding regime. To guide the eye, actual values (circles) have been interpolated by a cubic spline.) (b) correlation length λ determined by an exponential fit to the auto-correlation function of $\Delta f_c(t)$ as given in Eq. (7). For very small p_u the exponential fit becomes problematic because the process becomes practically uncorrelated, i.e. the correlation function turns into a Dirac delta function (the correlation length is not shown for $p_u < 0.3$).

If agents are too eager (too fast, high update probability p_u) to optimize their neighbourhood, the global level of cooperation becomes suboptimal when compared to slow adaption ('sloppyness', low p_u): If agents optimize their situation too 'fast' everybody is worse off on average.

We have further taken a closer look at the correlations in the system via the auto-correlation function of the first differences of $f_c(t)$, given by $\Delta f_c(t) \equiv f_c(t) - f_c(t-1)$. The envelope of the auto-correlation function is fitted to an exponential with inverse correlation length λ , i.e.

$$\langle \Delta f_c(t + \tau) \Delta f_c(t) \rangle \sim e^{-\lambda \tau} \quad (7)$$

for $\tau > 0$. Values of λ for different update-probabilities are summarized in Figure 5b. As expected, between $p_u = 1$ and $p_u = 0.8$ correlation is very strong. Lowering p_u below 0.8 leads to a decrease in the correlation, where the exponential fit becomes more and more problematic. We found that for $p_u < 0.3$, the correlation function resembles the shape of a Dirac delta function and the exponential fit loses sensibility.

Let us now discuss the important point of how sensitive the results are to changes in the specific dynamics chosen. Towards this end, we have compared results of the model in the form presented here with a formulation without the $\Theta(p_j(t))$ term in Eq. (5). This variation only leads to slight changes in the oscillatory states of the system at high p_u (giving a slightly lower $\langle f_c \rangle$). For lower p_u the difference between the two formulations became negligible (not shown). A more massive change in the dynamics occurs when reformulating the model via dropping the specific assumption of locality, i.e. the assumption of building up new links only to next-to-nearest neighbours. To do so, we implemented a variant in which β new links to a set of random nodes $\tilde{N}^{rand}(t+1; \beta)$ in the system are established. The agents now know the strategies of random players in the system and the payoff of additional links is determined by $\bar{P}_i^{add, V1}(t+1) = \sum_{\tilde{N}^{rand}(t+1; \beta)} a_i^c P_{ij} a_j(t)$. Figure 2c shows the respective dynamics of $f_c(t)$: For $p_u^{rand} = 1$ we recover oscillatory behaviour. Compared to the $p_u = 1$ case of the initial model we observe a considerably reduced amplitude. This is expected since $\tilde{N}_i^{rand}(t+1; \beta)$ will always contain defectors, whereas the initial $\tilde{N}_i(t+1)$ mainly consists of cooperators (as the next-to-nearest neighbours are typically cooperators since links to defectors are immediately cancelled). This can be compared to the expected payoff being reduced via lowering p_u in the initial model, which results in more defecting next-to-nearest neighbours (as sanctions are not applied immediately). Apparently, Figure 2c suggests that these two effects are nearly analogous when choosing the update-probabilities appropriately. Apart from the observation that the average level of cooperation in the random variant is a little bit higher than in the initial model the time-series match quite well (see the empirical distribution in the inset). Concerning the slightly higher mean of the random variant we conjecture that this is due to a welfare effect stemming from the elimination of imperfect information and from knowledge about global topology. Although the 'random variant' of the model provides a closer understanding of the model-dynamics, we will continue with the discussion of the initial model since it is much more realistic.

3.3 Impact of 'agility' α and β and the influence of payoff matrix elements

To quantitatively describe the influence of the parameters α and β on f_c , we kept both parameters equal and performed simulations for values ranging from

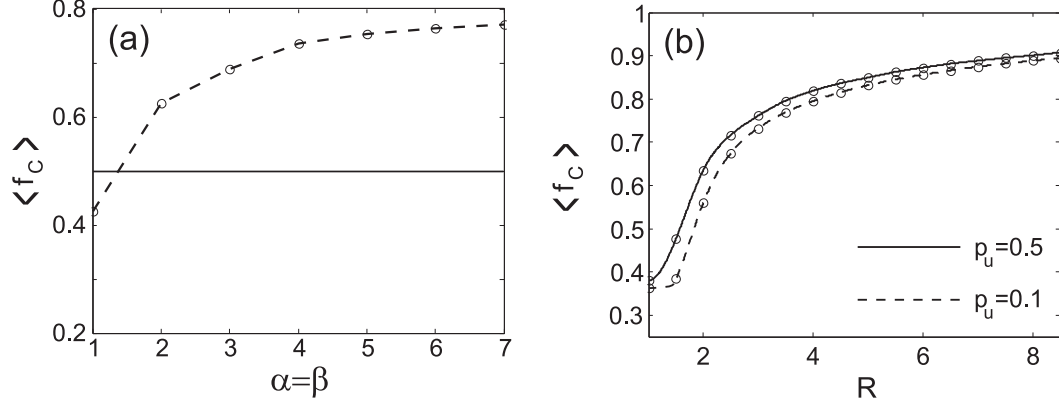


Fig. 6. (a) Influence of parameters α and β on the ratio of cooperating agents in a population of 10^3 players. The two parameters have been kept equal. Simulations were done for $p_u = 0.5$. (b) Influence of the payoff matrix element R on $\langle f_c \rangle$, where $T = 1 + R$ and the other elements remain unchanged.

$\alpha = \beta = 1$ to $\alpha = \beta = 7$. Results are summarized in Figure 6a, for $p_u = 0.5$ and for the payoff matrix given in Eq. (1). Only for a parametrization of $\alpha = \beta = 1$, the majority of agents is defecting. One recovers very unstable networks of low average connectivity of approximately 1.3 links per agent in this case. For higher values of $\alpha = \beta$, the system gets initially stabilized and the increase of f_c flattens as α increases. This can be understood as the parameter α has reached a value, where cooperating agents are able to cancel virtually all the links they have with defecting agents. In other words, the internal sanction-potential of the system has reached a maximum.

Clearly, not only the parameters α , β and p_u , but also the entries in the payoff matrix P_{ij} influence the dynamics obtained within the presented model. In this context, the entry for constellation I (equal to 0 in Eq. (1)) is of fundamental importance: When chosen such that defecting agents keep the links between one and another, a collapse of cooperation in the system is observed. On the other hand, increasing the values for temptation T and reward R , while holding their difference $T - R$ constant, increases the average number of cooperating agents. This is expected as the relative advantage of defectors over cooperators is reduced. The corresponding interrelation is quantitatively captured in Figure 6b for two values of p_u ($p_u = 0.5$ and $p_u = 0.1$), $\alpha = \beta = 6$ and $T = 1 + R$. Again, we observe a saturation effect similar to the one found when varying α and β . Additionally, for 'low' values of R , the update-probability apparently has comparatively larger influence on $\langle f_c \rangle$, whereas in the region of saturation, the increase caused by 'switching' between $p_u = 0.1$ and $p_u = 0.5$ is decreasing more and more.

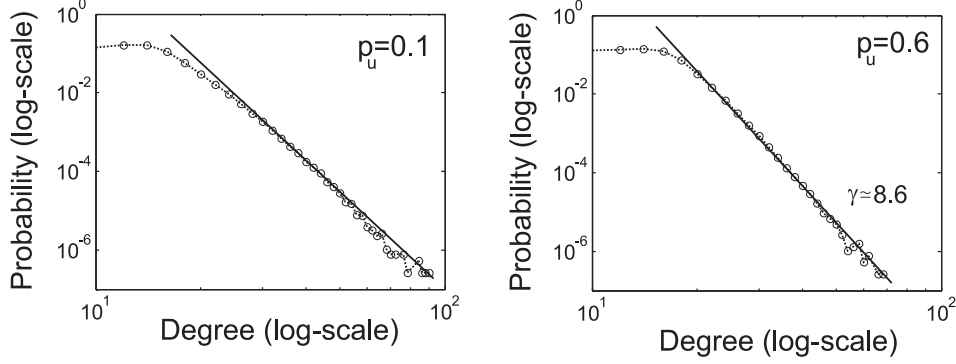


Fig. 7. Degree distributions averaged over time series with $T = 10^5$, $N = 10^3$, $\alpha = \beta = 6$ for two different values of the update probability p_u (0.1 and 0.6). The tail for $p_u = 0.6$ may be fitted by a power-law $P(k) \sim k^{-\gamma}$ with $\gamma \sim 8.6$.

3.4 Emerging network topology

The networks obtained as snap-shots of the dynamics exhibit interesting properties, resembling features of real-world networks. We confine ourselves to the discussion of the two most widely used quantities in the analysis of networks, the degree distribution and the cluster-coefficient [1,2]. Figure 7 shows the degree distribution $P(k)$ in a double-logarithmic plot for two values of p_u . To improve the accuracy of the plot, degree distributions of networks at 10^3 different times have been averaged. The correlation in the time-series has been taken care of by using time-intervals of inverse correlation length. Figure 7 depicts the degree-distribution for the $N = 10^3$ case, for $p_u = 0.1$ and $p_u = 0.6$. For $p_u = 0.1$, the power-law fit shown is slightly inadequate and indicates a function somewhere between a power-law and an exponential regime. For $p_u = 0.6$, the double-logarithmic plot indicates that the tail of the distribution can be expressed as a scaling law $P(k) \sim k^{-\gamma}$ with $\gamma \sim 8.6$. This shows that the network is clearly not random, but possesses self-similar structure. Lowering p_u , the network loses structure and becomes more random. We repeated the analysis for larger networks ($N = 5000$) and did not obtain different results.

The cluster coefficient C , defined as the average of all individual cluster coefficients C_i , provides a quantitative measure for cliques (i.e. circles of acquaintances in the network in which every member knows every other member) in the network. The individual cluster coefficient of a node i is defined as

$$C_i = \frac{2E_i}{k_i(k_i - 1)} \quad , \quad (8)$$

where E_i are the number of existing edges between i 's neighbours and $k_i(k_i - 1)/2$ gives the highest possible value of edges between the neighbours. As the expected total number of edges in a random graph can be obtained via $\bar{l}_{tot} = p(N(N - 1))/2$, one can compare the cluster coefficient obtained from

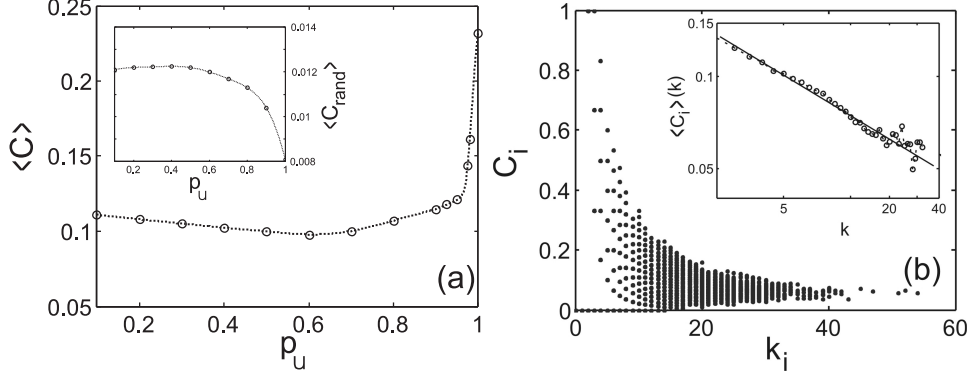


Fig. 8. (a) Time averages $\langle C \rangle$ of the cluster coefficient for different values of p_u and $\alpha = \beta = 6$. The insert shows the cluster coefficients of equivalent random graphs, denoted by $\langle C_{rand} \rangle$. $\langle C_{rand} \rangle$ is decreasing strongly for $p_u > 0.7$ because the average number of links in the system is dropping considerably in this regime. (b) Individual cluster coefficients C_i plotted against individual degree k_i for $p_u = 0.6$ and $\alpha = \beta = 6$. The insert shows the tail of the corresponding distribution in a double- logarithmic plot, where the individual C_i 's have been averaged. The slope of the interpolating line is $\delta \sim -0.4$.

given networks to those of equivalent random networks. Figure 8a shows the average cluster coefficients from simulations at different values of p_u , the other parameters being kept fixed ($\alpha = \beta = 6$). For comparison, also the cluster coefficients of equivalent random graphs are shown ($C_{rand} = p = \langle k \rangle / N$). Obviously, the observed networks exhibit large clustering- coefficients when compared to those of equivalent random graphs. This is not surprising, as our mechanism of linkage directly favours the formation of cliques. When taking a look at the dependence of the cluster-coefficient on p_u , a minimum at $p_u = 0.6$ can be identified. Interestingly, this minimum corresponds to the maximum of the number of cooperating agents in Figure 5a, and to the value of p_u where the degree distribution was best fitted with a power-law.

Plotting the cluster-coefficients C_i of individual agents vs. their degree k_i allows for a more sophisticated analysis of network structure. The corresponding plot is shown in Figure 8b, where each point corresponds to a pair $\{k_i, C_i\}$. The points have been sampled from 100 different networks. Based on this data, we have calculated the mean cluster-coefficient in dependence of the degree of the nodes, denoted by $\langle C_i \rangle(k)$. The tail of this distribution is shown in double logarithmic scale in the inset of Figure 8b. Clearly, there is a non-random relationship between cluster-coefficient and degree. The underlying networks exhibit (complex) hierarchical organisation: For small degrees the mean clustering is much higher than for large degrees. We also evaluated the number of cooperating agents as a function of degree, finding that $f_c(k)$ grows with degree (not shown). This confirms our expectation that the cooperators are the ones who build up new links and at the same time do not suffer from loosing ties.

Finally, Figure 9 shows the average distribution of individual payoffs in the system for $p_u = 0.1$ and $p_u = 0.6$. Although the maximum of the distribution is at a higher payoff for $p_u = 0.1$, the average payoff is higher for $p_u = 0.6$ as the tail of the distribution is 'fatter' in this case. The inset shows the tails of the distribution in a semi-logarithmic plot, indicating that the tails are close to exponential.

3.5 *Experimental evidence for cooperation networks*

As a proxy for a cooperation network of humans it is reasonable to consider telephone call networks. It is reasonable to assume that communication between cooperating individuals will dominate the total number of calls, while non-cooperating individuals will avoid communication. There exists recent research on real mobilephone-call networks [26]. In this study, a power-law degree distribution with a characteristic exponent $\gamma^{mobile} \sim 8.4$ was found. It is obvious, that the exponent obtained within our model ($\gamma \sim 8.6$) shows close resemblance to this value. This suggests that our model captures dynamics of real-world networks and has some predictive value. We think that the experimental procedure (temporally clearly limited measurements of networks) behind the data reported in [26] is much more comparable to the averaging procedure in our simulations than the procedures behind many other investigations hitherto, which often involve effects of growth.

4 Summary

In this work, we have considered the prisoner's dilemma being played on dynamic networks under the assumptions of rationality and strictly local information horizons of the agents. The novelty lies in the fact that links in the network are treated as a dynamical variable while – at the same time – we adopted an update-scheme based on profit-maximization and not on imitation. The network on which the game is played is thus an emergent structure, co-evolving with the configuration of strategy-space. Within this framework, reasonable assumptions about fully rational individual decisions lead to a model of network dynamics where defectors are effectively sanctioned in two ways: By implicitly being affected by link-cancellations and by explicitly not being able to establish new links as the players minimize potential losses by accepting only 'recommended' co-players.

We showed that the dynamics implied are non-linear and lead to the emergence of cooperative behaviour even within a framework of rationality. More precisely, we observed distinct modes in the model: In the case of high synchro-

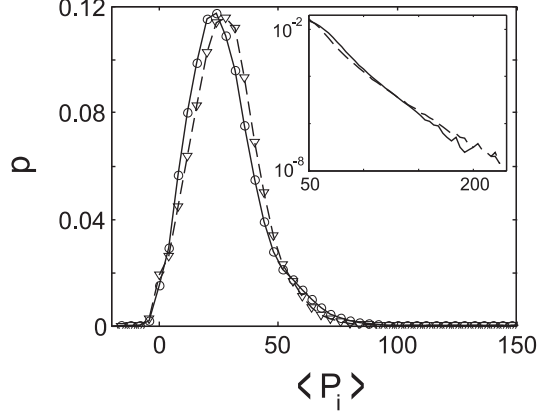


Fig. 9. Average distribution of the individual payoffs for $p_u = 0.1$ (broken line) and $p_u = 0.6$ (solid line) ($\alpha = \beta = 6$). The insert shows the tails of the distribution in a semi-logarithmic plot.

nization of the agents' decisions, significant oscillations of global parameters appear and much resources are wasted in collective movements. We have discussed the dependence of the system on the control-parameter in this regime. For low synchronisation of the agents, randomness in the system and delay of the players reactions reduces cooperation. For regimes in between high and low synchronization, we showed that the system reaches an optimum, where network characteristics resemble those of complex networks, exhibiting clearly non-random properties like power-law degree distribution and hierarchical clustering. Towards this end it is especially remarkable that our model predicts a rather high tail-exponent $\gamma = 8.6$ of real world communication networks (compare with $\gamma^{mobile} = 8.4$ in [26]).

It is interesting that oscillatory dynamics immanent for high synchronization have also been found in a spatial formulation of the prisoner's dilemma where participation in the game was voluntary [21]. Thus it seems that the cyclical dominance of the strategies found in [21] can be qualitatively confirmed even within the picture of (highly) dynamic networks. The fraction of cooperating agents in our model was found to be bound by roughly $f_c^+ \approx 0.9$ from above and by roughly $f_c^- \approx 0.4$ from below, showing a saturation regarding the studied parameters towards $f_c^+ = 0.9$. This is above the level of cooperation found in the voluntary formulation of the PD [21] and in the initial work of Nowak & May [12], but below typical fractions found for the PD on variable networks with imitative behavior of agents [24]. It is not surprising that imitation on dynamic networks yields higher overall degree of cooperation than rationality since on fixed structures cooperation is sustainable for imitation but not (or much less) sustainable for rational settings.

The current work may be extended in various directions: On the one hand, we expect that introduction of heterogeneity in the payoff matrix and the parameters α and β (i.e. that these parameters take different values for the agents)

could lead to further interesting results. We also conjecture that coupling β to some measure of payoff (fitness) of the individual agents should introduce some new, realistic effects.

Acknowledgements

The authors acknowledge funding through the Austrian Science Fund (FWF), P17621-G05 and P19132-N16. S.T. would like to thank the SFI and in particular J.D. Farmer for the great hospitality.

References

- [1] R. Albert, A.-L. Barabási, *Rev. Mod. Phys.* 74 (2002) 47.
- [2] S. Dorogovtsev, J.F.F. Mendes, *Evolution of Networks: From Biological Nets to the Internet and WWW*. Oxford University Press, Oxford (2003).
- [3] B. Tadic, G.J. Rodgers, S. Thurner, *Int. J. Bif. Chaos* 17 (2007), in press.
- [4] J. Ito, K. Kaneko, *Phys. Rev. Lett.* 88 (2002) 028701.
- [5] R. Axelrod, *The Evolution of Cooperation*, Basic Books New York (1984).
- [6] B. Oborny, A. Kun, T. Czaran, S. Bokros, *Ecology* 81 (2000) 3291–3304.
- [7] B. Huberman, R. Lukose, *Science* 277 (1997) 535.
- [8] J. Miller, C. Butts, D. Rode, *J. Econ. Behav. and Org.* 47 (2002) 179.
- [9] G. Brennan, J. Buchanan, 1985. *The Reason of Rules: Constitutional Political Economy*. Cambridge University Press, Cambridge (1985).
- [10] J. Buchanan, *The Limits of Liberty: Between Anarchy and Leviathan*. University of Chicago Press, Chicago (1975).
- [11] G. Tullock, *Social Dilemma Of Autocracy, Revolution, Coup D’etat*. Liberty Fund, Indianapolis (2005).
- [12] M. Nowak, R. May, *Nature* 359 (1992) 826–829.
- [13] B.A. Huberman, N.S. Glance, *PNAS* 90 (2006) 7716.
- [14] G. Szabo, G. Fath, /cond-mat/0607344 (2006)
- [15] F.C. Santos, J.M. Pacheco, T. Lenaerts, *PNAS* 103 (2006) 3490.
- [16] J. Vukov, G. Szabó, *Phys. Rev. E* 71 (2005) 036133.
- [17] O. Durán, R. Mulet, *Physica D* 208 (2005) 257–265.
- [18] G. Abramson, M. Kuperman, *Phys. Rev. E* 63 (2003) 030901.

- [19] G. Szabó, J. Vukov, A. Szolnoki, Phys. Rev. E 72 (2005) 047107.
- [20] B. Kim, A. Trusina, P. Holme, P. Minnhagen, J. Chung, M. Choi, Phys. Rev. E 66 (2002) 021907.
- [21] G. Szabó, C. Hauert, Phys. Rev. E 66 (2002) 062903.
- [22] D. Ashlock, M.D. Smucker, E.A. Stanley, L. Tesfatsion, BioSystems 37 (1996) 99.
- [23] E. Hauk, Computational Economics 18 (2001) 65.
- [24] M. Zimmermann, V. Eguiluz, M. Miguel, Phys. Rev. E 69 (2004) 065102(R);
M. Zimmermann, V. Eguiluz, Phys. Rev. E 72 (2005) 056118.
- [25] V. Eguiluz, M. Zimmermann, C. Cela-Conde, AJS 110 (2005) 977.
- [26] J.-P. Onnela, J. Saramaki, J. Hyvonen, G. Szabo, D. Lazer, K. Kaski, J. Kertesz, A.-L. Barabasi, arxiv:physics/0610104 (2006).
- [27] P. Erdős, A. Renyi, Publ. Math. Inst. Hungar. Acad. Sci. 5 (1960) 17–61.